



# 产品目录

## Product catalog



常州市善莱德电器有限公司  
Changzhou Sunlight Electrical Appliance Co.,Ltd  
Office Address: 3rd Floor, building 66, Laimengchengxinshang, Hutang,  
Wujin district, Changzhou City, Jiangsu Province, China  
Tel.:86-519-83825998 0086-18806140118  
Website:www.czsunlight.com  
Alibaba website :https://czdcmotor.en.alibaba.com

江苏沃尔森电子科技有限公司  
Jiangsu Woersen Electronics Technology Co., Ltd  
Factory Address: NO.26, Heshanhuan Road, Jintan Economic Development Zone,  
Changzhou City, Jiangsu Province  
Tel.:86-519-83825998 Fax:86-519-83823899

**常州市善莱德电器有限公司**  
Changzhou Sunlight Electrical Appliance CO.,Ltd





## 公司简介

### Company profile

常州市善莱德电器有限公司是江苏沃尔森电子科技有限公司旗下国际销售公司。江苏沃尔森电子公司已经超过 20 年历史，公司从开始精密铝压铸、精密注塑、模具加工到专业直流电机、无刷电机、直流散热风扇和驱动控设计和开发等多元化集团企业，目前工厂已经通过 ISO9001、IATF16949 管理体系认证。公司专业研发团队，为客户提供专业定制化电机设计方案和驱动设计方案。

常州善莱德电器是一个充满活力的团队，专业为各种车辆的散热系统提供散热风扇服务商，目前我们主要多种尺寸直流风扇、长寿命无刷风扇、空调系统鼓风机、高压风扇以及一些定制的风扇。我们产品广泛应用新能源电动车辆、氢能能源卡车、工程车辆、冷藏车、农机车、城市交通车、公交巴士。目前产品主要出口全球市场，欧洲、中东、东南亚、和一带一路市场受到热烈欢迎。中国市场主要给主机车辆厂配套，金龙客车、徐工、三一集团、中联重科、铁建集团等车辆厂。

善莱德在发展的道路上，我们始终坚持质量企业生命线，诚信忠诚对待我们每一位客户。热烈欢迎国内外客户洽谈合作。

Changzhou Sunlight Electrical Appliance Co., Ltd. is the international sales subsidiary of Jiangsu Woerson Electronics Technology Co., Ltd. With over 20 years of history, Jiangsu Woerson started with precision aluminum die-casting, precision injection molding, and mold processing. The company has since evolved into a diversified group, specializing in the design, development, and manufacturing of DC motors, brushless motors, DC cooling fans, and drive control systems. The factory has been certified with ISO9001 and IATF16949 management system certifications. The company's dedicated R&D team offers customized motor and drive solutions to meet the specific needs of clients.

Changzhou Sunlight Electrical Appliance Co., Ltd. is a dynamic team specializing in providing cooling fan solutions for various vehicle thermal management systems. Our main products include a wide range of DC fans in various sizes, long-life brushless fans, air conditioning system blowers, high-pressure fans, and custom-designed fans. These products are widely used in new energy electric vehicles, hydrogen-powered trucks, construction machinery, refrigerated trucks, agricultural vehicles, urban transport vehicles, and buses. Our products are primarily exported to global markets, with a strong presence in Europe, the Middle East, Southeast Asia, and Belt and Road Initiative regions. In the Chinese market, our products are mainly supplied to leading vehicle manufacturers such as King Long Bus, XCMG, SANY Group, Zoomlion, and China Railway Construction Corporation.

As Sunlight continues to develop, we remain committed to the belief that quality is the lifeblood of the enterprise, and integrity is fundamental to our relationships with every customer. We warmly welcome both domestic and international clients to engage in discussions for cooperation.



## 目录

## Contents

### Brushless Fan

Φ 225mm 9IN 02

Φ 255mm 10IN 03

Φ 305mm 12IN 04

Φ 355mm 14IN 06

Φ 385mm 16IN 07

Φ 520mm 20IN 09

Pin Connector 10

Connection Mode 11

### Brush Fan

Φ 200mm 8IN 13

Φ 225mm 9IN 13

Φ 255mm 10IN 14

Φ 280mm 11IN 14

Φ 305mm 12IN 16

Φ 355mm 14IN 18

Φ 385mm 16IN 19

### Brushless Fan(Low Power)

Φ 200mm 8IN 20

Φ 225mm 9IN 21

Φ 255mm 10IN 22

Φ 280mm 11IN 23

Φ 305mm 12IN 25

Φ 355mm 14IN 28

Φ 385mm 16IN 29

Evaporating Fan 30

Water Pump 32

Other Products 33

Where there is power supply  
there is sunlight



## 工程案例




## Brushless Fan $\phi$ 225mm 9IN


Reference Picture:



电机外型图 Dimensions:

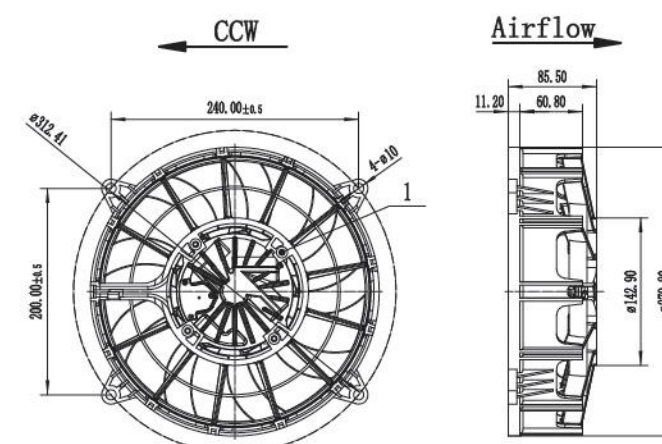

风量曲线图 Performance Curve

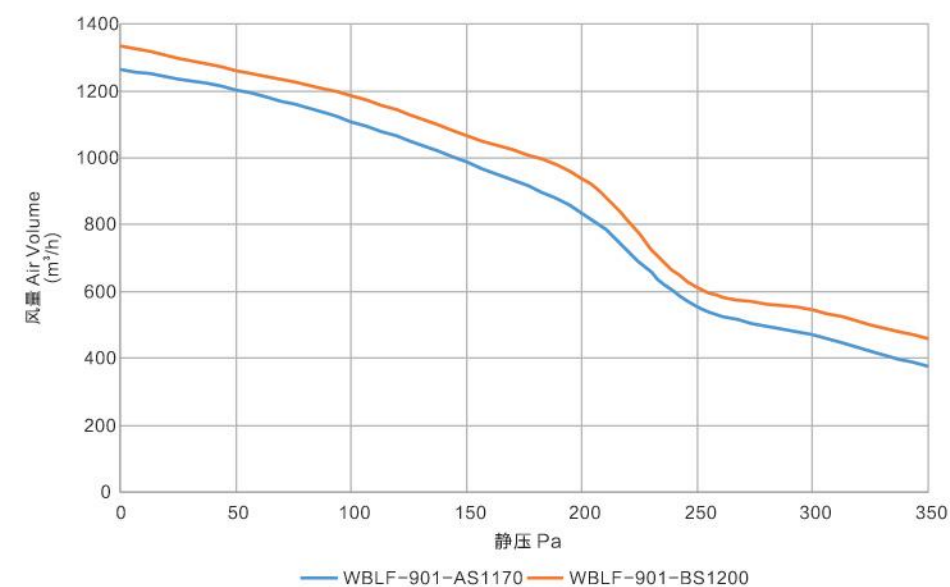

| 产品号<br>Part No  | 电压<br>Voltage (V) | 电压范围<br>Range (V) | 电流<br>Current (A) | 功率<br>Power (W) | 转速<br>Speed (RPM) | 风量@100Pa<br>Air Volume (m³/h) |
|-----------------|-------------------|-------------------|-------------------|-----------------|-------------------|-------------------------------|
| WBLF-901-BS1200 | 24                | 16-32             | 7                 | 200             | 4300              | 1200                          |
| WBLF-901-AS1170 | 12                | 9-16              | 11                | 170             | 4100              | 1150                          |

备注：风量为实验室测试结果，环境温度 $20 \pm 5^\circ\text{C}$ ，测试压力0 pa  
Note: Air flow is tested under 0 pa &  $20 \pm 5^\circ\text{C}$




## Brushless fan $\phi$ 255mm 10IN


Reference Picture:



电机外型图 Dimensions:

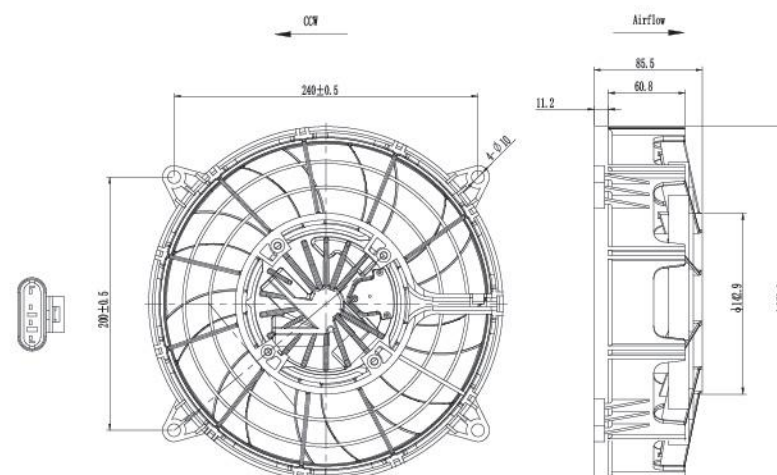

风量曲线图 Performance Curve

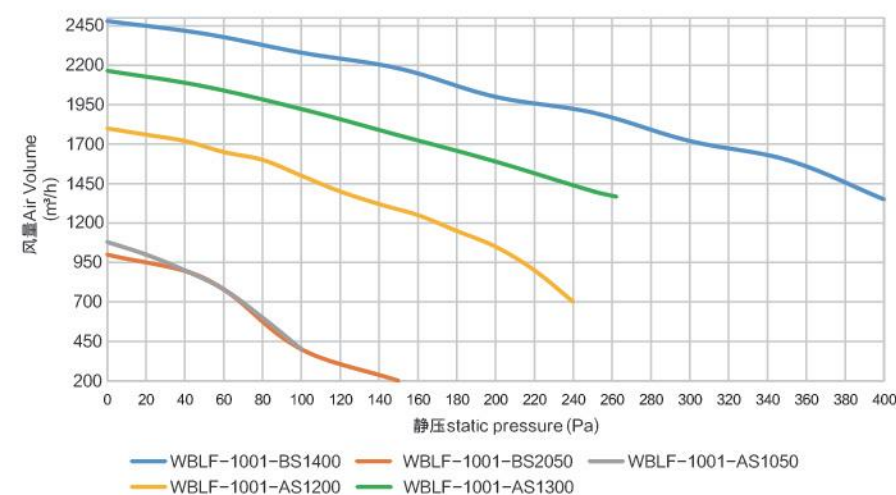

| 产品号<br>Part No   | 电压<br>Voltage (V) | 电压范围<br>Range (V) | 电流<br>Current (A) | 功率<br>Power (W) | 转速<br>Speed (RPM) | 风量@100Pa<br>Air Volume (m³/h) |
|------------------|-------------------|-------------------|-------------------|-----------------|-------------------|-------------------------------|
| WBLF-1001-AS1350 | 12                | 9-16              | 29                | 350             | 4000              | 2100                          |
| WBLF-1001-AS1200 | 12                | 9-16              | 15                | 200             | 3400              | 1500                          |
| WBLF-1001-BS2050 | 24                | 16-32             | 2                 | 50              | 2000              | 400                           |
| WBLF-1001-BS1400 | 24                | 16-32             | 15                | 400             | 4350              | 2380                          |
| WBLF-1001-AS1050 | 12                | 9-16              | 4                 | 50              | 2000              | 450                           |


备注: 风量为实验室测试结果, 环境温度 $20 \pm 5^\circ\text{C}$ , 测试压力0 pa  
Note: Air flow is tested under 0 pa &  $20 \pm 5^\circ\text{C}$

## Brushless Fan $\phi$ 305mm 12IN


Reference Picture:



电机外型图 Dimensions:

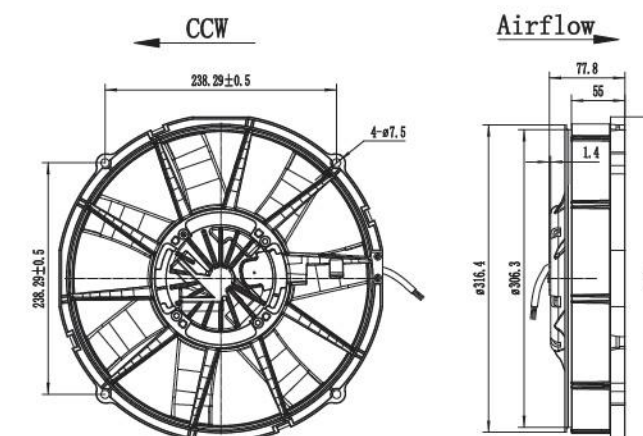

风量曲线图 Performance Curve

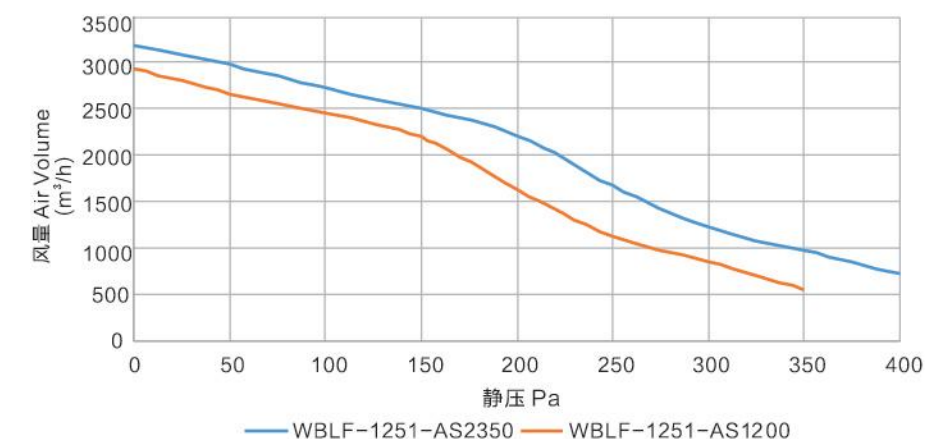

| 产品号<br>Part No   | 电压<br>Voltage (V) | 电压范围<br>Range (V) | 电流<br>Current (A) | 功率<br>Power (W) | 转速<br>Speed (RPM) | 风量@100Pa<br>Air Volume (m³/h) |
|------------------|-------------------|-------------------|-------------------|-----------------|-------------------|-------------------------------|
| WBLF-1251-AS2350 | 12                | 9-16              | 28                | 350             | 3300              | 2700                          |
| WBLF-1251-AS1200 | 12                | 9-16              | 23                | 200             | 2800              | 2500                          |

备注: 风量为实验室测试结果, 环境温度 $20 \pm 5^\circ\text{C}$ , 测试压力0 pa  
Note: Air flow is tested under 0 pa &  $20 \pm 5^\circ\text{C}$




## Brushless Fan $\phi$ 305mm 12IN


Reference Picture:



电机外型图 Dimensions:

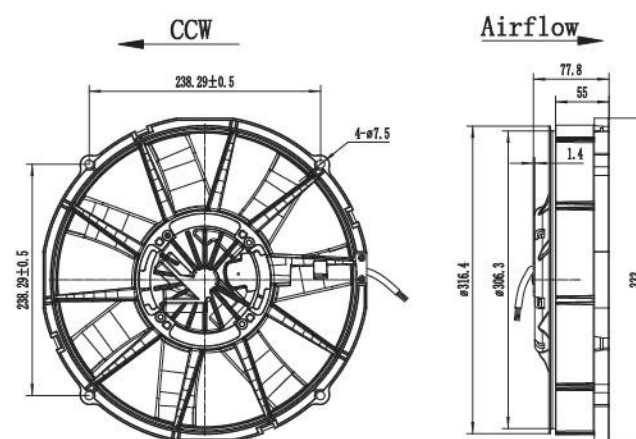

风量曲线图 Performance Curve

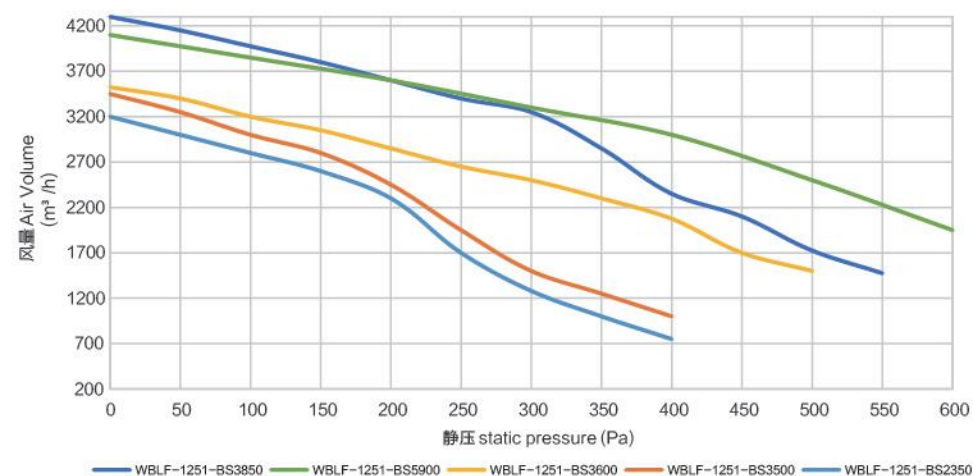

| 产品号<br>Part No   | 电压<br>Voltage (V) | 电压范围<br>Range (V) | 电流<br>Current (A) | 功率<br>Power (W) | 转速<br>Speed (RPM) | 风量@100Pa<br>Air Volume (m³/h) |
|------------------|-------------------|-------------------|-------------------|-----------------|-------------------|-------------------------------|
| WBLF-1251-BS3850 | 24                | 16-32             | 32                | 800             | 4350              | 4000                          |
| WBLF-1251-BS5900 | 24                | 16-32             | 39                | 900             | 4850              | 3900                          |
| WBLF-1251-BS3600 | 24                | 16-32             | 24                | 600             | 4250              | 3200                          |
| WBLF-1251-BS3500 | 24                | 16-32             | 19                | 500             | 3550              | 3000                          |
| WBLF-1251-BS2350 | 24                | 16-32             | 14                | 350             | 3300              | 2800                          |


备注: 风量为实验室测试结果, 环境温度 $20 \pm 5^\circ\text{C}$ , 测试压力0 pa  
Note: Air flow is tested under 0 pa &  $20 \pm 5^\circ\text{C}$

## Brushless Fan $\phi$ 355mm 14IN


Reference Picture:



电机外型图 Dimensions:

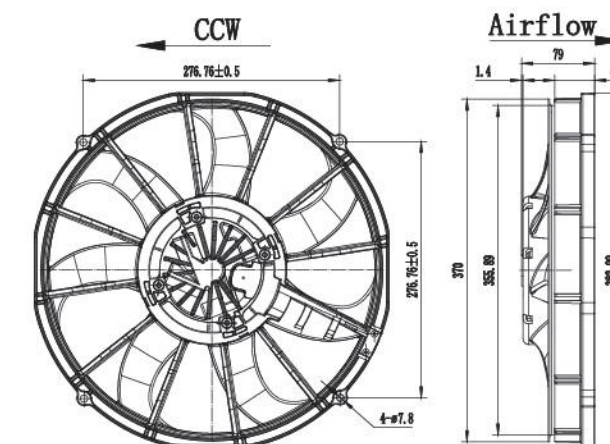

风量曲线图 Performance Curve

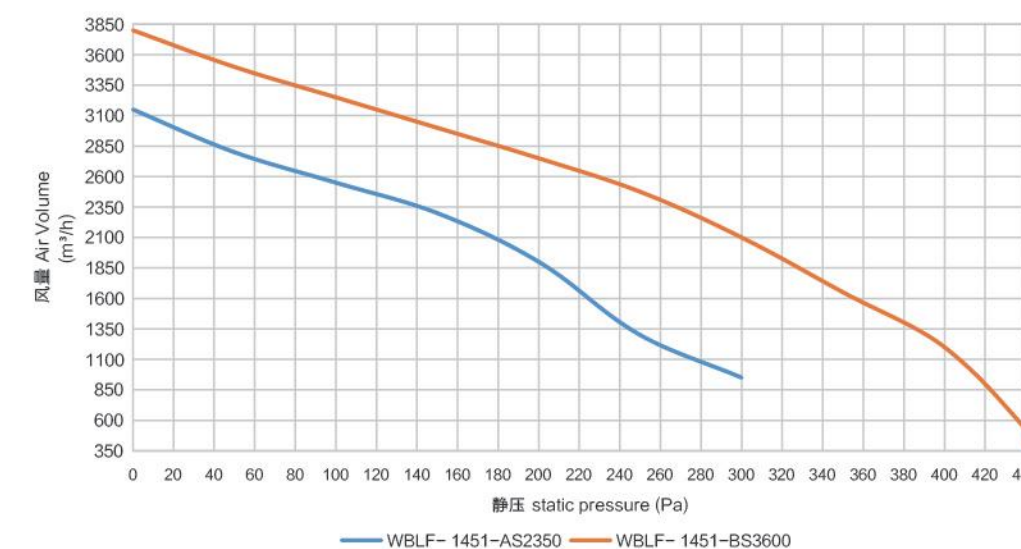

| 产品号<br>Part No   | 电压<br>Voltage (V) | 电压范围<br>Range (V) | 电流<br>Current (A) | 功率<br>Power (W) | 转速<br>Speed (RPM) | 风量@100Pa<br>Air Volume (m³/h) |
|------------------|-------------------|-------------------|-------------------|-----------------|-------------------|-------------------------------|
| WBLF-1451-AS2350 | 12                | 9-16              | 25                | 300             | 2800              | 2500                          |
| WBLF-1451-BS3600 | 24                | 16-32             | 23                | 600             | 3500              | 3700                          |

备注: 风量为实验室测试结果, 环境温度 $20 \pm 5^\circ\text{C}$ , 测试压力0 pa  
Note: Air flow is tested under 0 pa &  $20 \pm 5^\circ\text{C}$




## Brushless Fan $\phi$ 385mm 16IN


Reference Picture:



电机外型图 Dimensions:

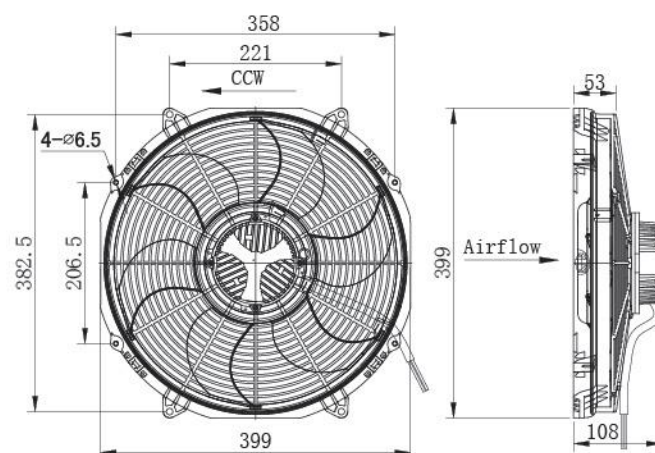

风量曲线图 Performance Curve

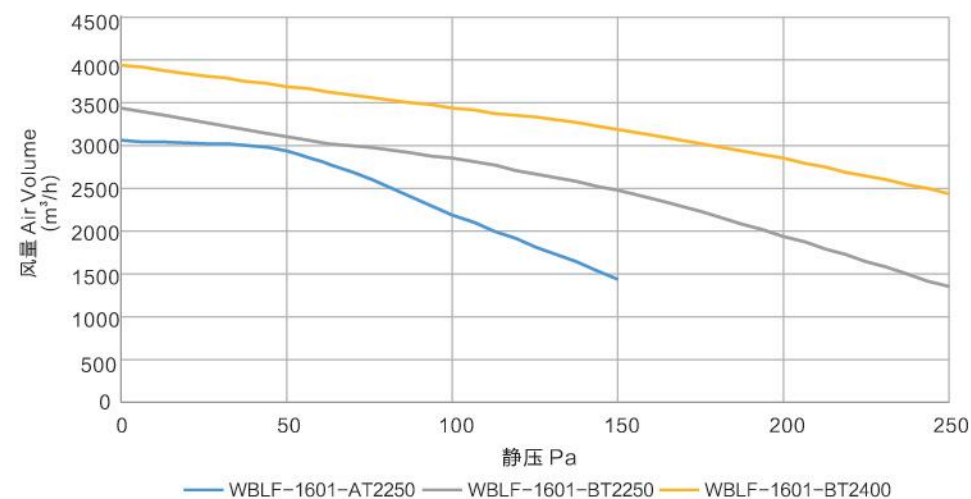

| 产品号<br>Part No   | 电压<br>Voltage (V) | 电压范围<br>Range (V) | 电流<br>Current (A) | 功率<br>Power (W) | 转速<br>Speed (RPM) | 风量@100Pa<br>Air Volume (m³/h) |
|------------------|-------------------|-------------------|-------------------|-----------------|-------------------|-------------------------------|
| WBLF-1601-AT2250 | 12                | 9~16              | 25                | 250             | 2650              | 2700                          |
| WBLF-1601-BT2250 | 24                | 16~32             | 13                | 250             | 2650              | 2600                          |
| WBLF-1601-BT2400 | 24                | 16~32             | 22                | 400             | 3100              | 3500                          |


备注: 风量为实验室测试结果, 环境温度 $20 \pm 5^\circ\text{C}$ , 测试压力0 pa  
Note: Air flow is tested under 0 pa &  $20 \pm 5^\circ\text{C}$

## Brushless Fan $\phi$ 385mm 16IN


Reference Picture:



电机外型图 Dimensions:

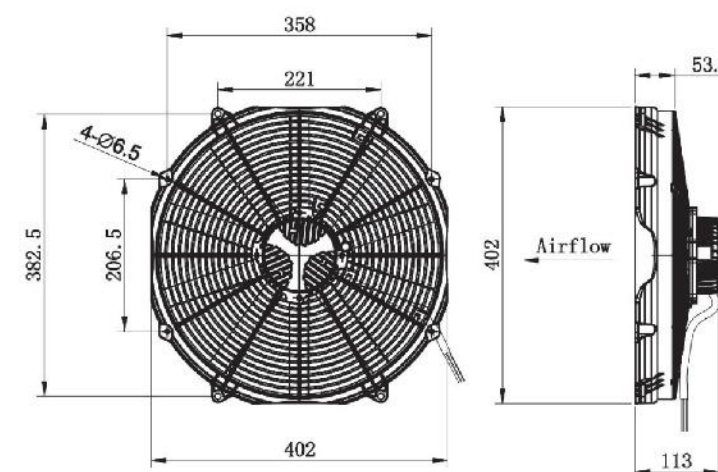

风量曲线图 Performance Curve

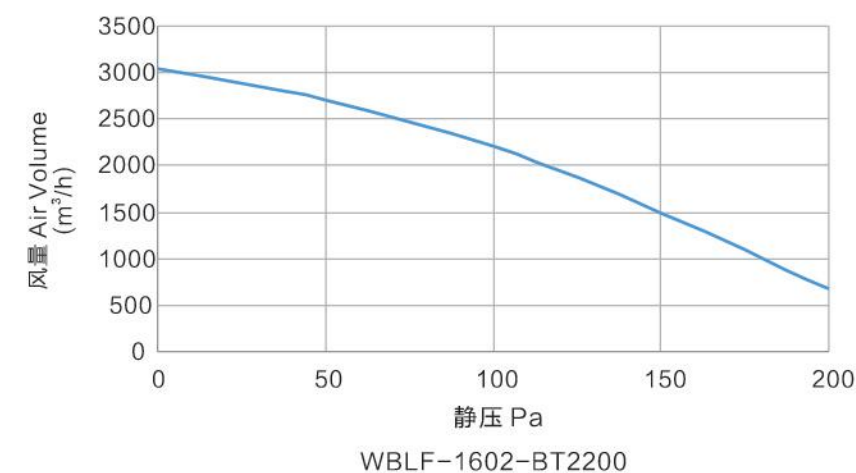

| 产品号<br>Part No   | 电压<br>Voltage (V) | 电压范围<br>Range (V) | 电流<br>Current (A) | 功率<br>Power (W) | 转速<br>Speed (RPM) | 风量@100Pa<br>Air Volume (m³/h) |
|------------------|-------------------|-------------------|-------------------|-----------------|-------------------|-------------------------------|
| WBLF-1602-AT2200 | 12                | 9~16              | 16                | 200             | 2700              | 2250                          |
| WBLF-1602-BT2200 | 24                | 16~32             | 8                 | 200             | 2700              | 2250                          |

备注: 风量为实验室测试结果, 环境温度 $20 \pm 5^\circ\text{C}$ , 测试压力0 pa  
Note: Air flow is tested under 0 pa &  $20 \pm 5^\circ\text{C}$




## Brushless Fan $\phi$ 520mm 20IN


Reference Picture:



电机外型图 Dimensions:

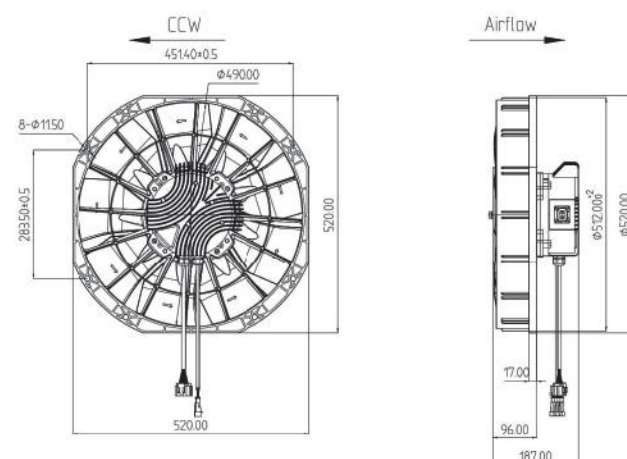

风量曲线图 Performance Curve



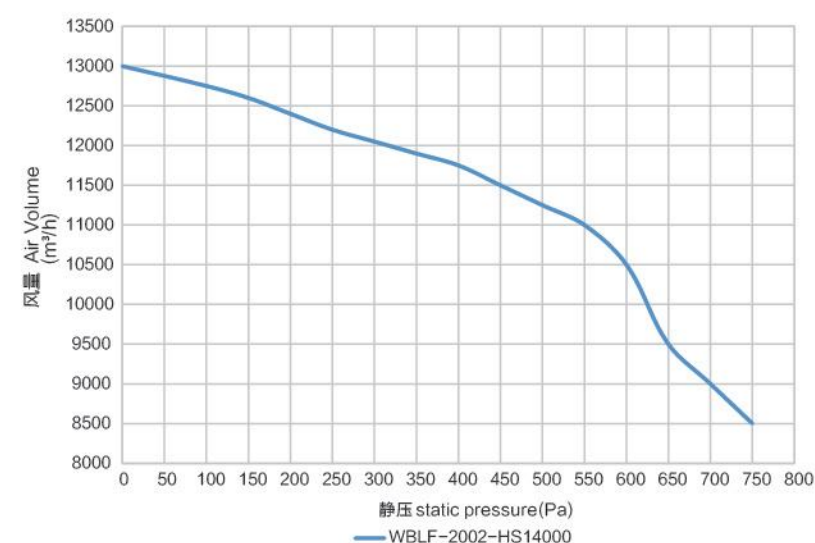


| 产品号<br>Part No    | 电压<br>Voltage (V) | 电压范围<br>Range (V) | 电流<br>Current (A) | 功率<br>Power (KW) | 转速<br>Speed (RPM) | 风量@100Pa<br>Air Volume (m³/h) |
|-------------------|-------------------|-------------------|-------------------|------------------|-------------------|-------------------------------|
| WBLF-2001-HS14000 | 600               | 400~750           | 8                 | 4.5              | 2900              | 16000                         |

备注: 风量为实验室测试结果, 环境温度 $20 \pm 5^\circ\text{C}$ , 测试压力0 pa  
Note: Air flow is tested under 0 pa &  $20 \pm 5^\circ\text{C}$


PWM和CAN可用  
PWM and CAN are both options

## Pin Connector

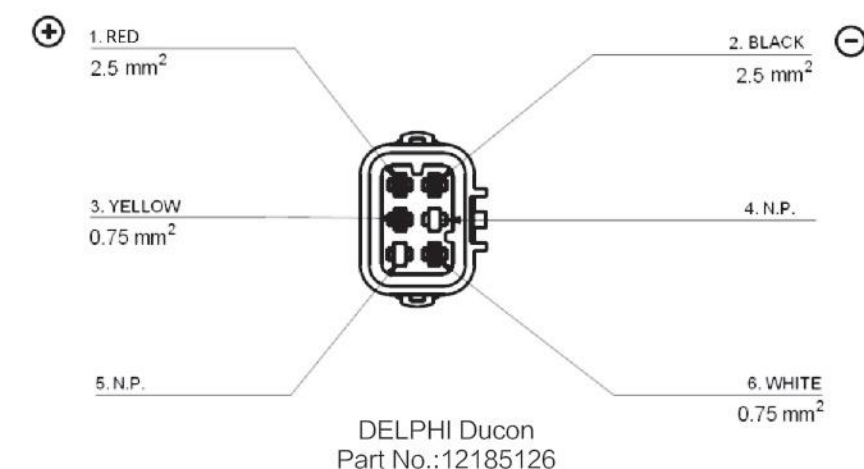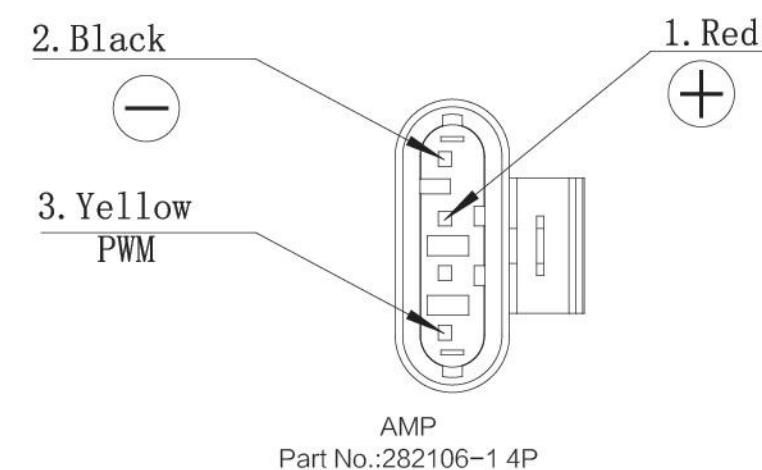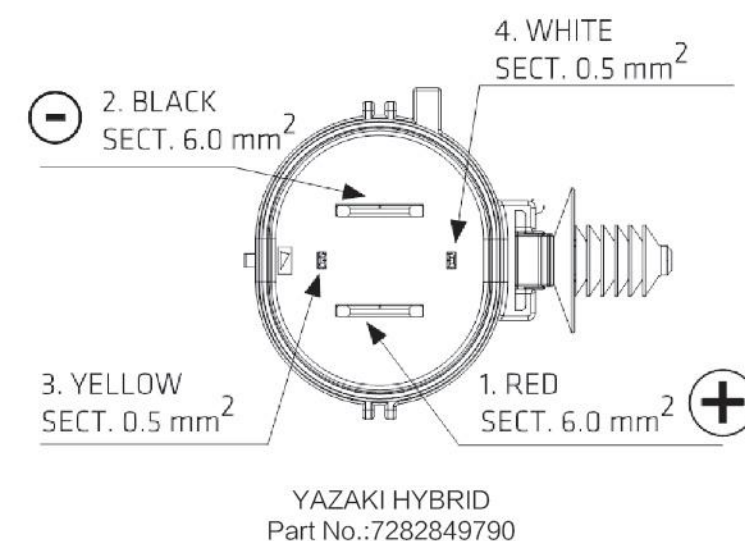





## Connection Mode

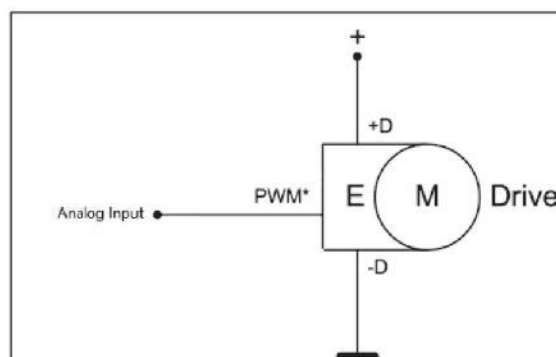

模拟电压调速  
Analog control

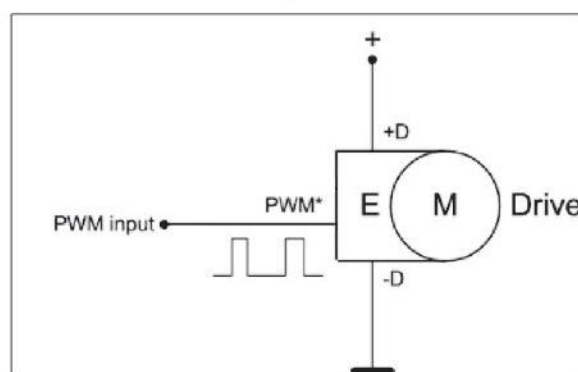


高电平有效数字 PWM 信号调速 (兼容低电平有效数字信号)  
Digital PWM input/active high(Digital PWM input/active low)

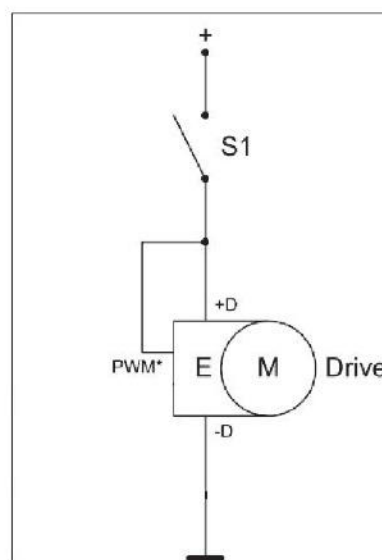



电源正极控制 (全速)  
On/off to plus (full speed)

FG 反馈可以兼容:  
故障高电平反馈  
运转高电平反馈  
转速实时转速反馈

## Connection Mode

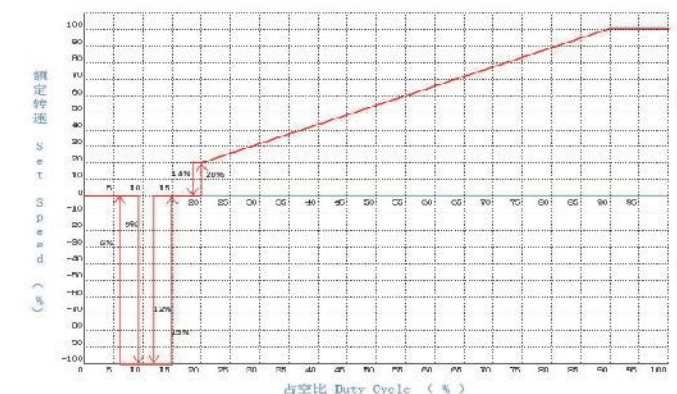

正反转调速 (只支持数字 PWM 信号控制)

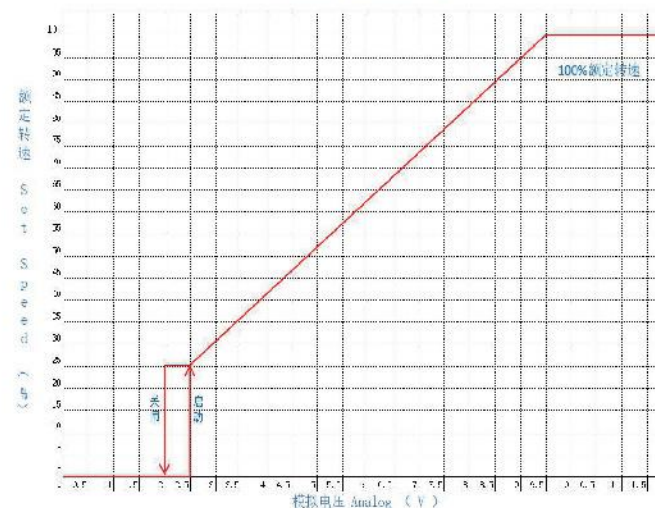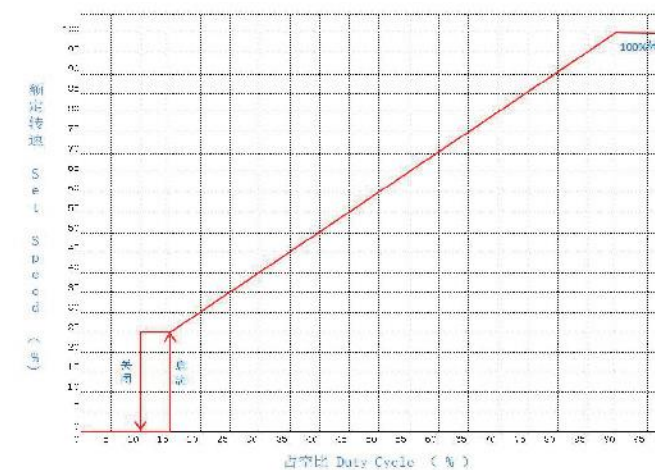


单方向调速 (兼容数字 PWM 信号和模拟电压控制)



Brush Fan  $\phi$  200mm 8IN SLT-0812X/C-W10  
SLT-0824X/C-W10



电机外型图 Dimensions:

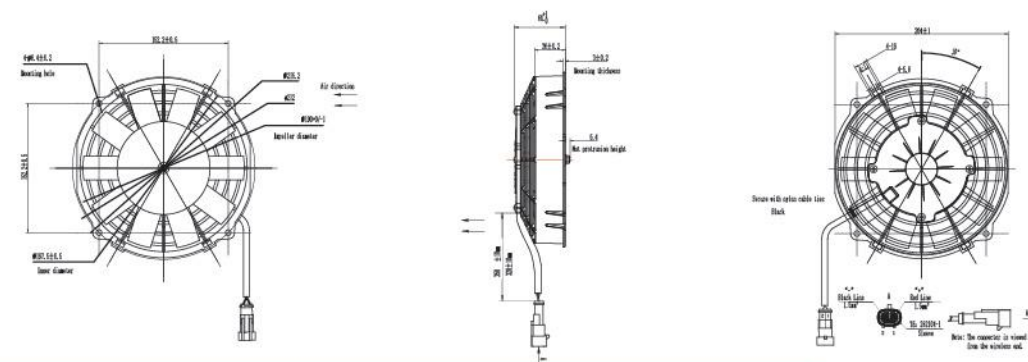


| Specification: |                               |
|----------------|-------------------------------|
| 测试电压           | Test Voltage:12/24V           |
| 负载电流           | Load current: $\leq 8/4A$     |
| 负载转速           | Load Speed:3800 $\pm 4\%$ rpm |
| 静 压            | Static Pressure:0Pa           |
| 风 量            | Air Volume: $\leq 710m^3/h$   |
| 噪 音            | Noise: $\leq 70db(A)$         |
| 振 动            | Vibration: $\leq 3.5m/S^2$    |
| 直 径            | Diameter:7.5inch              |
| 防水等级           | Waterproof:IP63/IP68          |

Brush Fan  $\phi$  255mm 10IN SLT-1012X/C-W10  
SLT-1024X/C-W10



电机外型图 Dimensions:

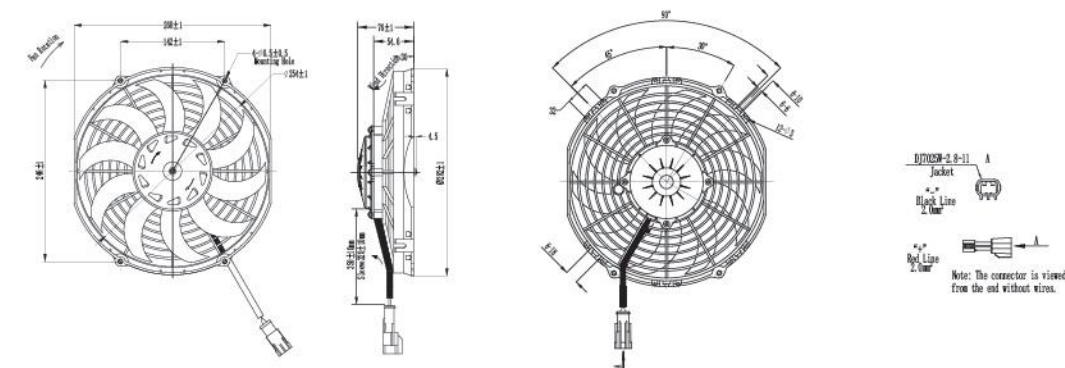


| Specification: |                               |
|----------------|-------------------------------|
| 测试电压           | Test Voltage:24V              |
| 负载电流           | Load Current: $\leq 6A$       |
| 负载转速           | Load Speed:3200 $\pm 4\%$ rpm |
| 静 压            | Static Pressure:100Pa         |
| 风 量            | Air Volume: $\leq 1800m^3/h$  |
| 噪 音            | Noise: $\leq 70db(A)$         |
| 振 动            | Vibration: $\leq 3.5m/S^2$    |
| 直 径            | Diameter:10inch               |

Brush Fan  $\phi$  225mm 9IN SLT-0912X/C-W10  
SLT-0924X/C-W10



电机外型图 Dimensions:

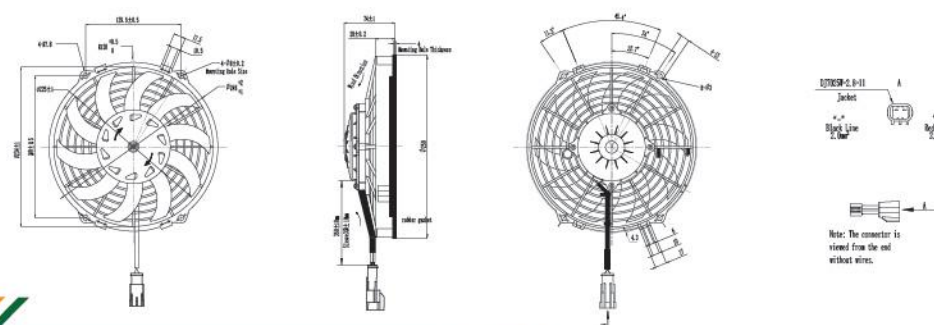


| Specification: |                              |
|----------------|------------------------------|
| 测试电压           | Test Voltage:12/24V          |
| 负载电流           | Load Current: $\leq 10/5A$   |
| 负载转速           | Load Speed: $\leq 10/5A$     |
| 静 压            | Static Pressure:100Pa        |
| 风 量            | Air Volume: $\leq 1700m^3/h$ |
| 噪 音            | Noise: $\leq 70db(A)$        |
| 振 动            | Vibration: $\leq 3.5m/S^2$   |
| 直 径            | Diameter:9inch               |
| 防水等级           | Waterproof:IP63/IP68         |

Brush Fan  $\phi$  280mm 11IN SLT-1112X/C-5  
SLT-1124X/C-5



电机外型图 Dimensions:

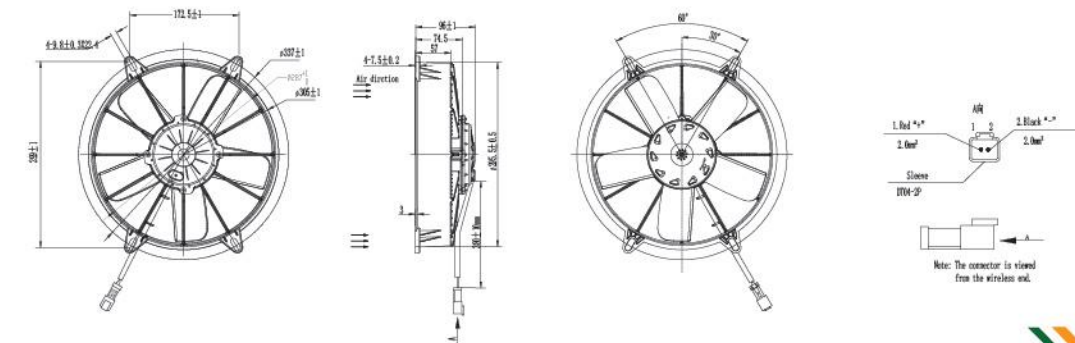


| Specification: |                               |
|----------------|-------------------------------|
| 测试电压           | Test Voltage:24V              |
| 负载电流           | Load Current: $\leq 10A$      |
| 负载转速           | Load Speed:2700 $\pm 5\%$ rpm |
| 静 压            | Static Pressure:100Pa         |
| 风 量            | Air Volume: $\leq 1900m^3/h$  |
| 噪 音            | Noise: $\leq 70db(A)$         |
| 振 动            | Vibration: $\leq 3.5m/S^2$    |
| 直 径            | Diameter:11inch               |



Brush Fan  $\phi$  280mm 11IN SLT-1112X/C-W7  
SLT-1124X/C-W7



电机外型图 Dimensions:

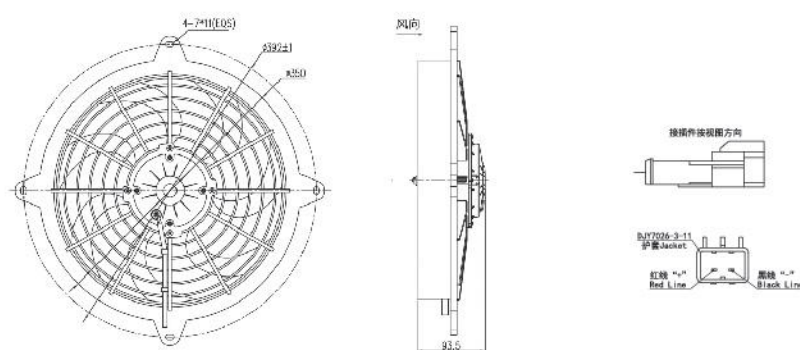


| Specification: |                               |
|----------------|-------------------------------|
| 测试电压           | Test Voltage:24VDC            |
| 负载电流           | Load Current: $\leq 7A$       |
| 负载转速           | Load Speed:2800 $\pm$ 200 rpm |
| 静 压            | Static Pressure:0Pa           |
| 风 量            | Air Volume: $\leq 2000m^3/h$  |
| 噪 音            | Noise: $\leq 70db(A)$         |
| 振 动            | Vibration: $\leq 100mg$       |
| 防水等级           | Waterproof:IP63/IP68          |

Brush Fan  $\phi$  305mm 12IN SLT-1212X/C-5S  
SLT-1224X/C-5S



电机外型图 Dimensions:

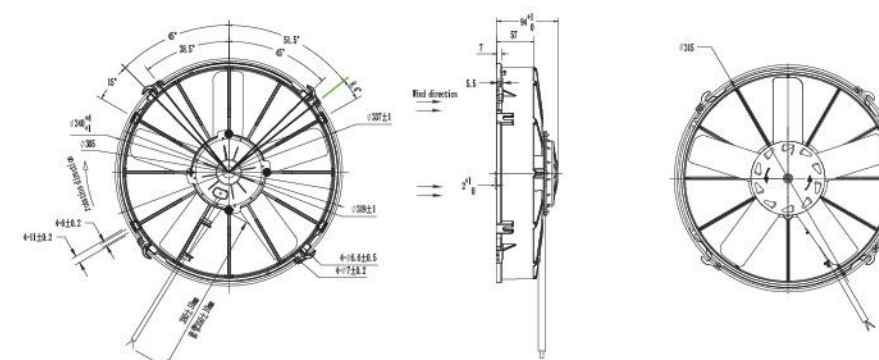


| Specification: |                               |
|----------------|-------------------------------|
| 测试电压           | Test Voltage:24VDC            |
| 负载电流           | Load Current: $\leq 7A$       |
| 负载转速           | Load Speed:2700 $\pm$ 150 rpm |
| 静 压            | Static Pressure:0Pa           |
| 风 量            | Air Volume: $\leq 2280m^3/h$  |
| 噪 音            | Noise: $\leq 70db(A)$         |
| 振 动            | Vibration: $\leq 100mg$       |
| 直 径            | Diameter:12inch               |
| 防水等级           | Waterproof:IP63/IP68          |

Brush Fan  $\phi$  280mm 11IN SLT-1112X/C-W10  
SLT-1124X/C-W10



电机外型图 Dimensions:

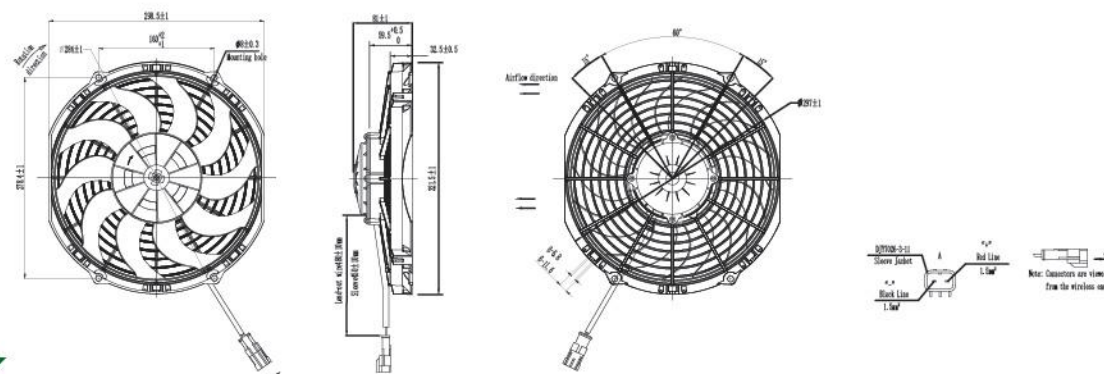


| Specification: |                               |
|----------------|-------------------------------|
| 测试电压           | Test Voltage:24VDC            |
| 负载电流           | Load Current: $\leq 7A$       |
| 负载转速           | Load Speed:2800 $\pm$ 200 rpm |
| 静 压            | Static Pressure:0Pa           |
| 风 量            | Air Volume: $\leq 2000m^3/h$  |
| 噪 音            | Noise: $\leq 70db(A)$         |
| 振 动            | Vibration: $\leq 100mg$       |
| 防水等级           | Waterproof:IP63/IP68          |

Brush Fan  $\phi$  305mm 12IN SLT-1212X/C-5C  
SLT-1224X/C-5C



电机外型图 Dimensions:

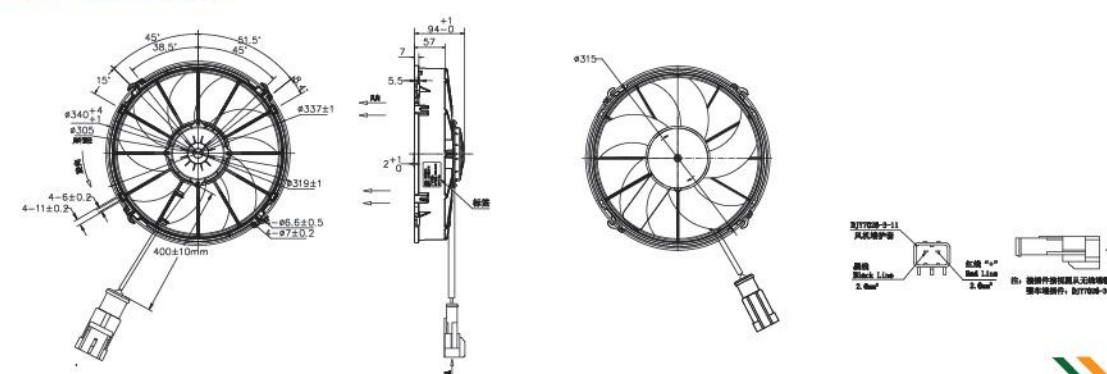


| Specification: |                              |
|----------------|------------------------------|
| 测试电压           | Test Voltage:12V             |
| 负载电流           | Load Current: $\leq 8.0A$    |
| 负载转速           | Load Speed:2800 $\pm$ 100rpm |
| 静 压            | Static Pressure:0Pa          |
| 风 量            | Air Volume: $\geq 2400m^3/h$ |
| 噪 音            | Noise: $\leq 78dB (A)$       |
| 振 动            | Vibration: $\leq 3.5m/S^2$   |
| 直 径            | Diameter:12inch              |



Brush Fan  $\phi$  305mm 12IN SLT-1212X/C-W5  
SLT-1224X/C-W5



电机外型图 Dimensions:

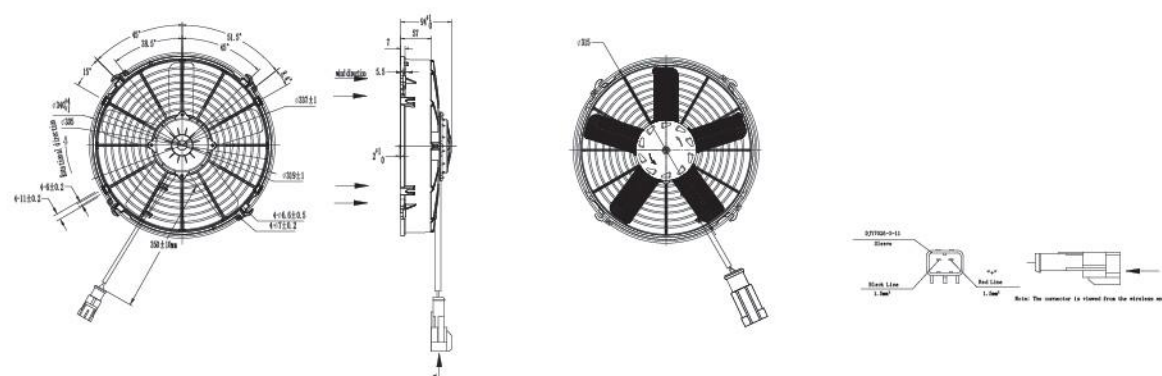


Specification:

|      |                              |
|------|------------------------------|
| 测试电压 | Test Voltage:24V             |
| 负载电流 | Load Current: $\leq 7.0A$    |
| 负载转速 | Load Speed:2700 $\pm$ 100rpm |
| 静 压  | Static Pressure:0Pa          |
| 风 量  | Air Volume: $\geq 2400m^3/h$ |
| 噪 音  | Noise: $\leq 78dB$ (A)       |
| 振 动  | Vibration: $\leq 3.5m/S^2$   |
| 直 径  | Diameter:12inch              |

Brush Fan  $\phi$  305mm 12IN SLT-1212X/C-W10  
SLT-1224X/C-W10



电机外型图 Dimensions:

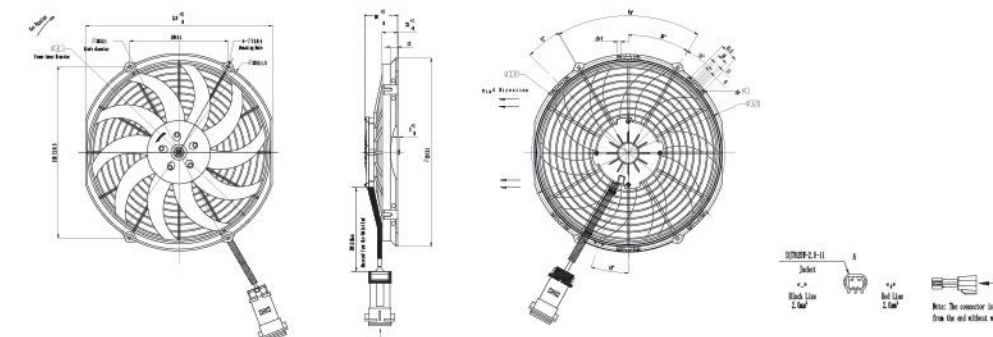


Specification:

|      |                              |
|------|------------------------------|
| 测试电压 | Test Voltage:24V             |
| 负载电流 | Load Current: $\leq 7A$      |
| 负载转速 | Load Speed:2700 $\pm$ 4% rpm |
| 静 压  | Static Pressure:100Pa        |
| 风 量  | Air Volume: $\leq 1800m^3/h$ |
| 噪 音  | Noise: $\leq 70db$ (A)       |
| 振 动  | Vibration: $\leq 3.5m/S^2$   |
| 直 径  | Diameter:12inch              |

Brush Fan  $\phi$  305mm 12IN SLT-1212X/C-7  
SLT-1224X/C-7



电机外型图 Dimensions:

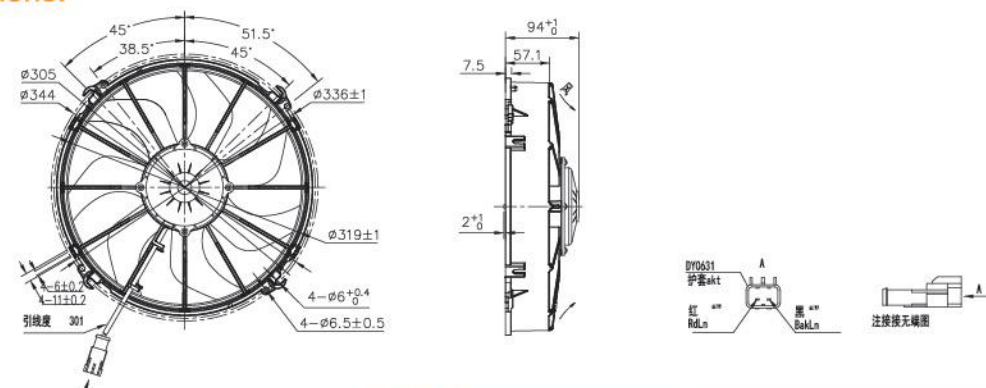


Specification:

|      |                              |
|------|------------------------------|
| 测试电压 | Test Voltage:12V             |
| 负载电流 | Load Current: $\leq 5.0A$    |
| 负载转速 | Load Speed:2800 $\pm$ 100rpm |
| 静 压  | Static Pressure:0Pa          |
| 风 量  | Air Volume: $\geq 2200m^3/h$ |
| 噪 音  | Noise: $\leq 75dB$ (A)       |
| 振 动  | Vibration: $\leq 3.5m/S^2$   |
| 直 径  | Diameter:12inch              |

Brush Fan  $\phi$  355mm 14IN SLT-1412X/C-W10  
SLT-1424X/C-W10



电机外型图 Dimensions:

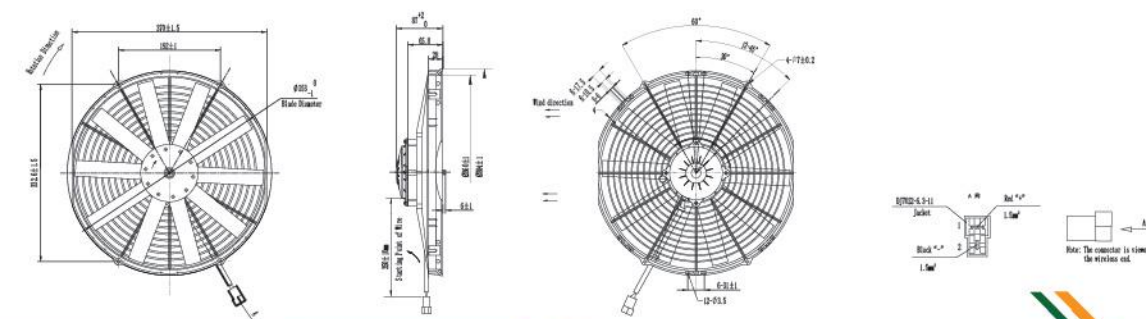

Specification:

|      |                              |
|------|------------------------------|
| 测试电压 | Test Voltage:27V             |
| 负载电流 | Load Current: $\leq 8A$      |
| 负载转速 | Load Speed:2900 rpm $\pm$ 3% |
| 静 压  | Static Pressure:100Pa        |
| 风 量  | Air Volume: $\leq 2200m^3/h$ |
| 噪 音  | Noise: $\leq 78db$ (A)       |
| 振 动  | Vibration: $\leq 3.5m/S^2$   |
| 直 径  | Diameter:14inch              |




Brush Fan  $\phi$  385mm 16IN SLT-1612X/C-W10  
SLT-1624X/C-W10



Specification:

|      |                                   |
|------|-----------------------------------|
| 测试电压 | Test Voltage:27V                  |
| 负载电流 | Load Current:≤8.5A                |
| 负载转速 | Load Speed:2900 ± 3% rpm          |
| 静压   | Static Pressure:100Pa             |
| 风量   | Air Volume:≤2600m <sup>3</sup> /h |
| 噪音   | Noise:≤78db(A)                    |
| 振动   | Vibration:≤3.5m/S <sup>2</sup>    |
| 直径   | Diameter:16inch                   |

电机外型图 Dimensions:

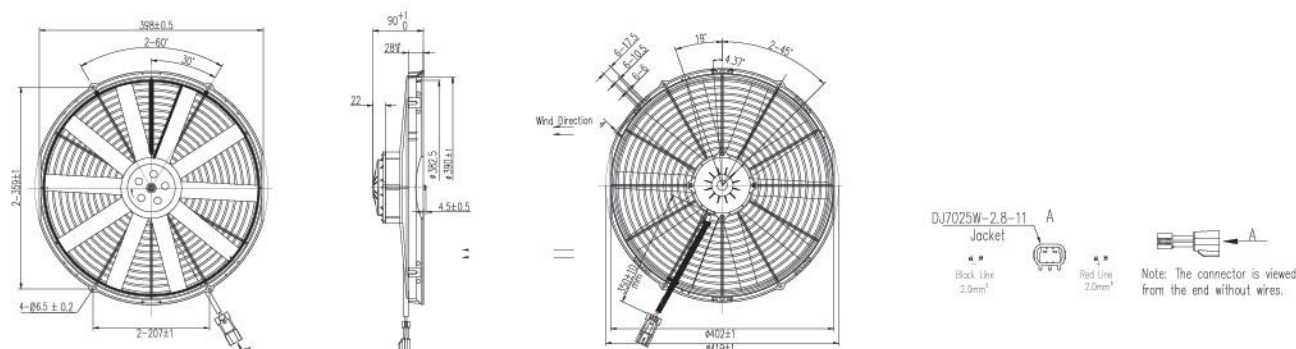


Brushless Fan  $\phi$  200mm 8IN SLTBLDC-0812X/C-W10  
SLTBLDC-0824X/C-W10




Specification:

|      |                                  |
|------|----------------------------------|
| 测试电压 | Test Voltage:12V                 |
| 负载电流 | Load Current:≤6.0A               |
| 负载转速 | Load Speed:3650 ± 100rpm         |
| 静压   | Static Pressure:0Pa              |
| 风量   | Air Volume:≥700m <sup>3</sup> /h |
| 噪音   | Noise:≤70dB (A)                  |
| 振动   | Vibration:≤3.5m/S <sup>2</sup>   |
| 直径   | Diameter:8inch                   |

电机外型图 Dimensions:

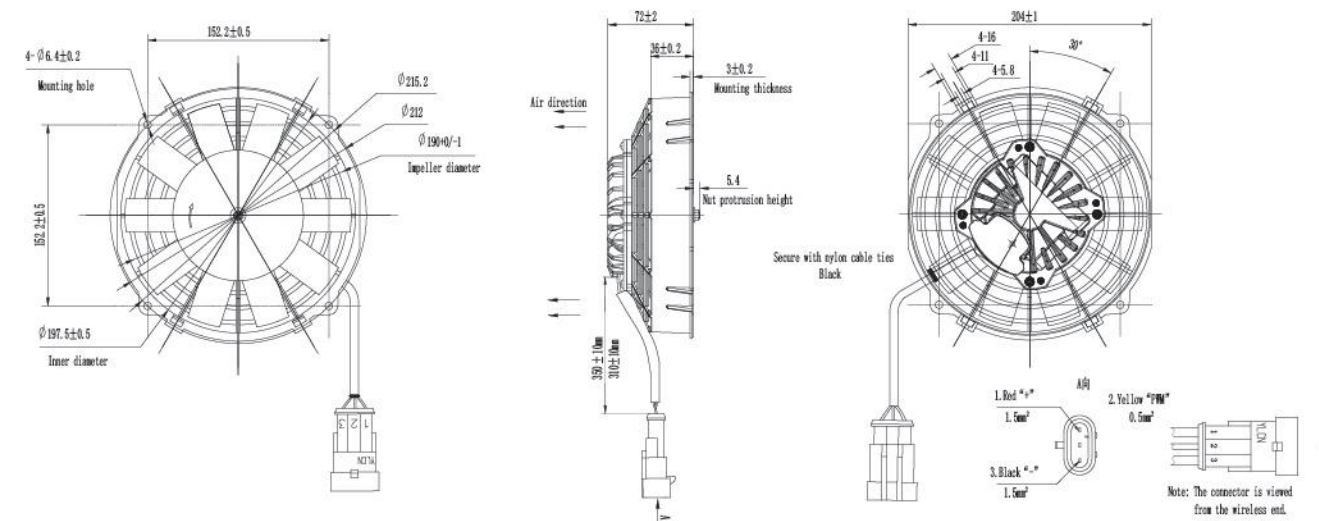

风量曲线图 Performance Curve

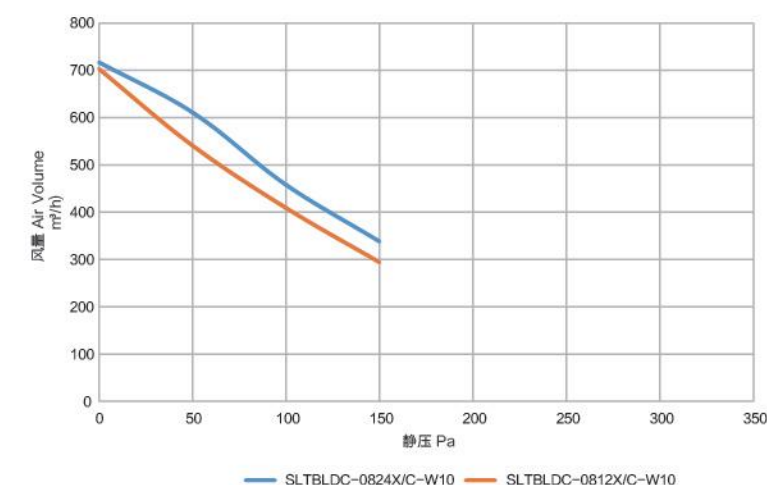








Brushless Fan  $\Phi$  280mm 11IN SLTBLDC-1112X/C-W7  
SLTBLDC-1124X/C-W7




| Specification: |                              |
|----------------|------------------------------|
| 测试电压           | Test Voltage:12V             |
| 负载电流           | Load Current: $\leq 12.0A$   |
| 负载转速           | Load Speed: $3200 \pm 50rpm$ |
| 静 压            | Static Pressure:0Pa          |
| 风 量            | Air Volume: $\geq 1900m^3/h$ |
| 噪 音            | Noise: $\leq 76dB (A)$       |
| 振 动            | Vibration: $\leq 3.5m/S^2$   |
| 直 径            | Diameter:11inch              |

电机外型图 Dimensions:

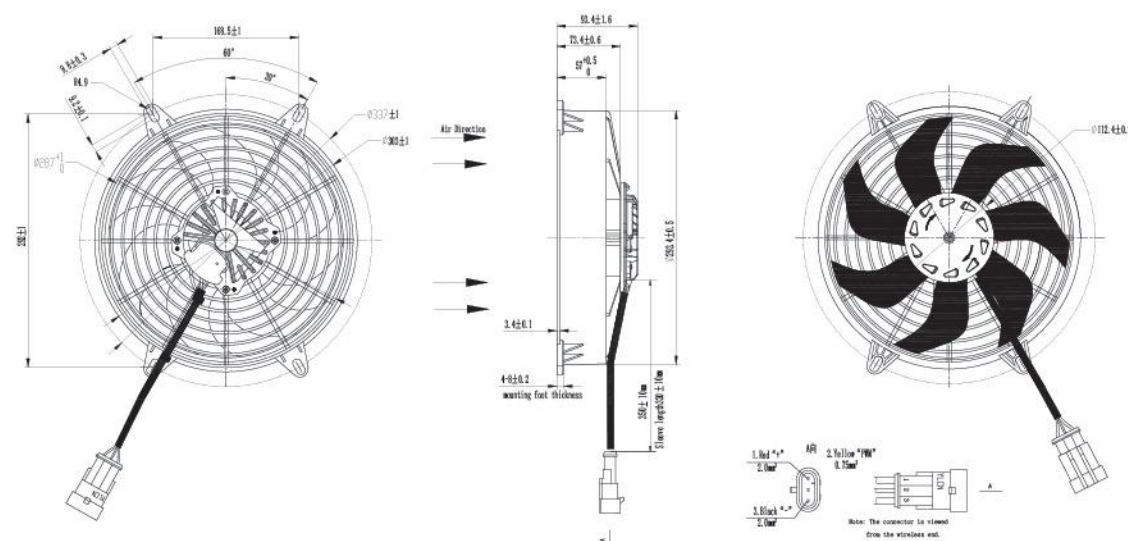

风量曲线图 Performance Curve

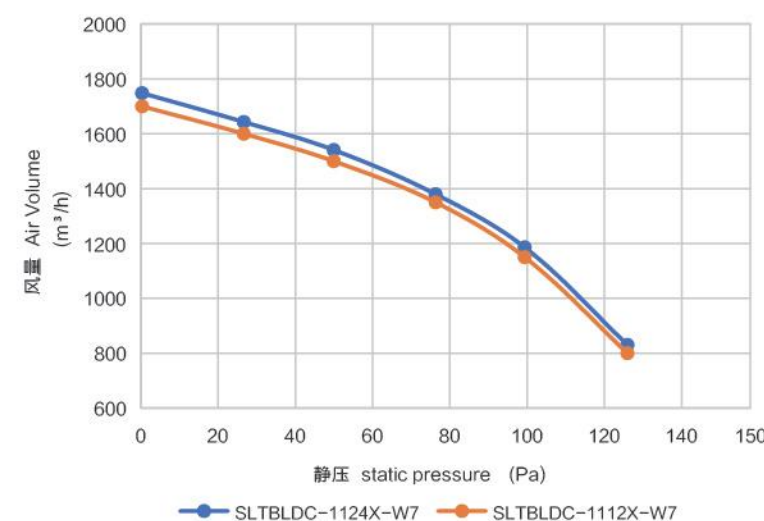


Brushless Fan  $\Phi$  280mm 11IN SLTBLDC-1112X/C-W10  
SLTBLDC-1124X/C-W10




| Specification: |                              |
|----------------|------------------------------|
| 测试电压           | Test Voltage:12V             |
| 负载电流           | Load Current: $\leq 12.0A$   |
| 负载转速           | Load Speed: $1650 \pm 50rpm$ |
| 静 压            | Static Pressure: 0Pa         |
| 风 量            | Air Volume: $\geq 1900m^3/h$ |
| 噪 音            | Noise: $\leq 73dB (A)$       |
| 振 动            | Vibration: $\leq 3.5m/S^2$   |
| 直 径            | Diameter:11inch              |

电机外型图 Dimensions:

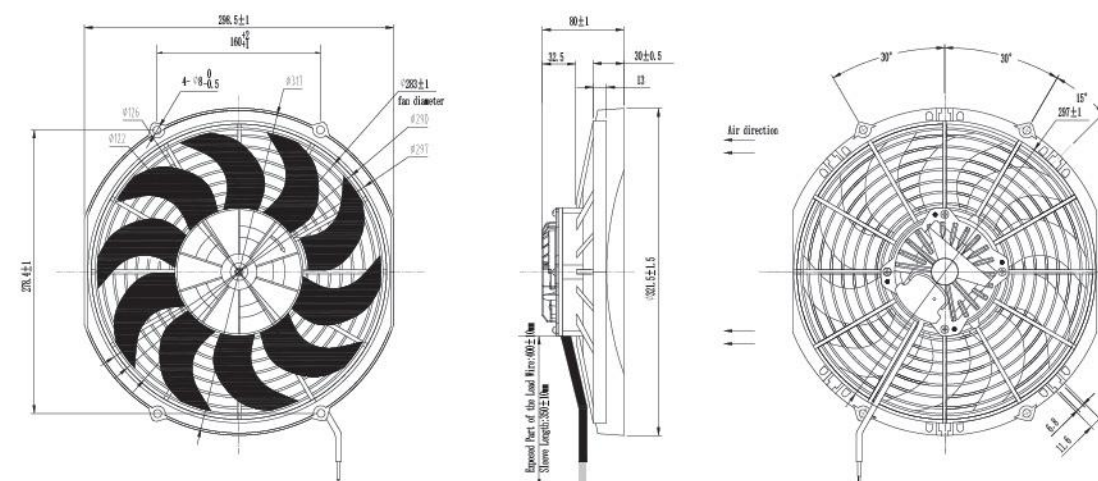

风量曲线图 Performance Curve

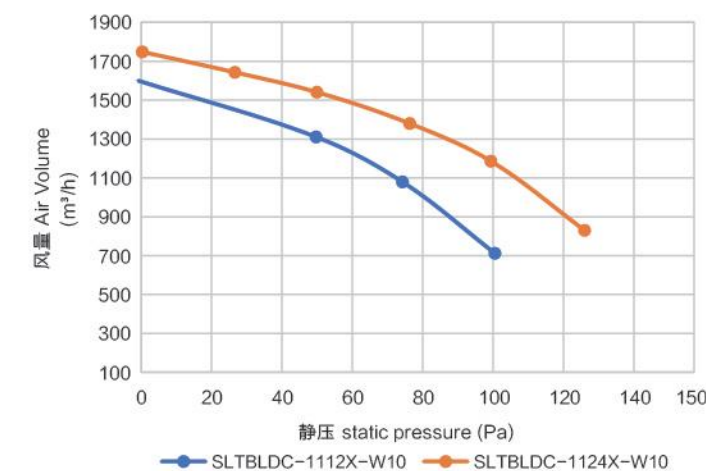




Brushless Fan  $\Phi$  305mm 12IN SLTBLDC-1212X/C-5  
SLTBLDC-1224X/C-5




Specification:

|      |                              |
|------|------------------------------|
| 测试电压 | Test Voltage:12V             |
| 负载电流 | Load Current: $\leq 18.0A$   |
| 负载转速 | Load Speed: $3200 \pm 50rpm$ |
| 静压   | Static Pressure:0Pa          |
| 风量   | Air Volume: $\geq 2800m^3/h$ |
| 噪音   | Noise: $\leq 81dB(A)$        |
| 振动   | Vibration: $\leq 3.5m/S^2$   |
| 直径   | Diameter:12inch              |

电机外型图 Dimensions:

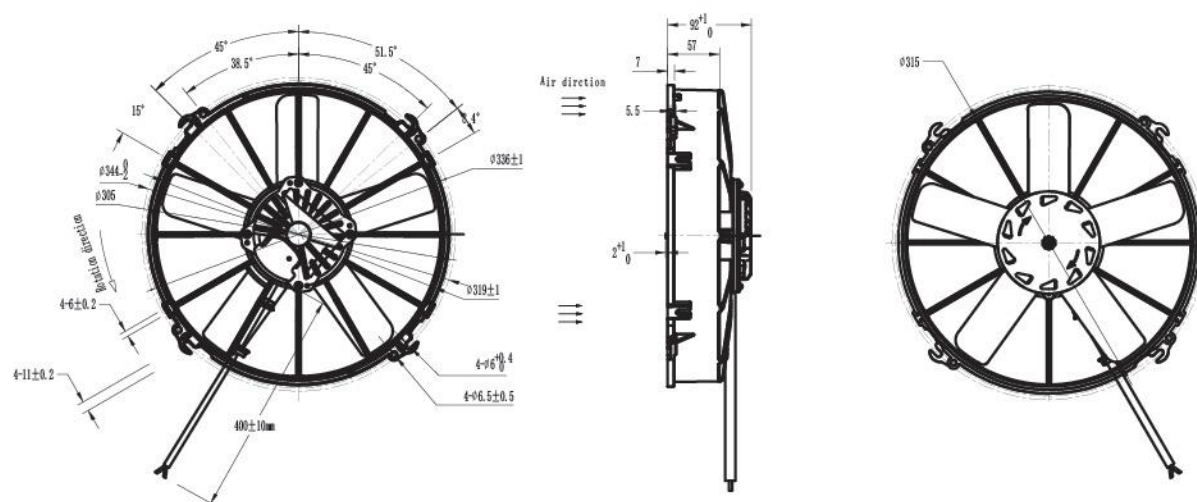

风量曲线图 Performance Curve

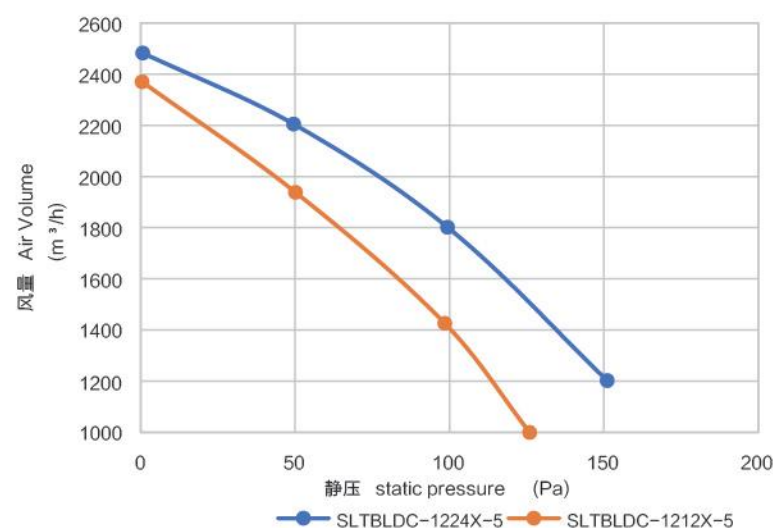


Brushless Fan  $\Phi$  305mm 12IN SLTBLDC-1212X/C-W7  
SLTBLDC-1224X/C-W7




Specification:

|      |                              |
|------|------------------------------|
| 测试电压 | Test Voltage:12V             |
| 负载电流 | Load Current: $\leq 12.0A$   |
| 负载转速 | Load Speed: $3200 \pm 50rpm$ |
| 静压   | Static Pressure:0Pa          |
| 风量   | Air Volume: $\geq 2200m^3/h$ |
| 噪音   | Noise: $\leq 76dB(A)$        |
| 振动   | Vibration: $\leq 3.5m/S^2$   |
| 直径   | Diameter:12inch              |

电机外型图 Dimensions:

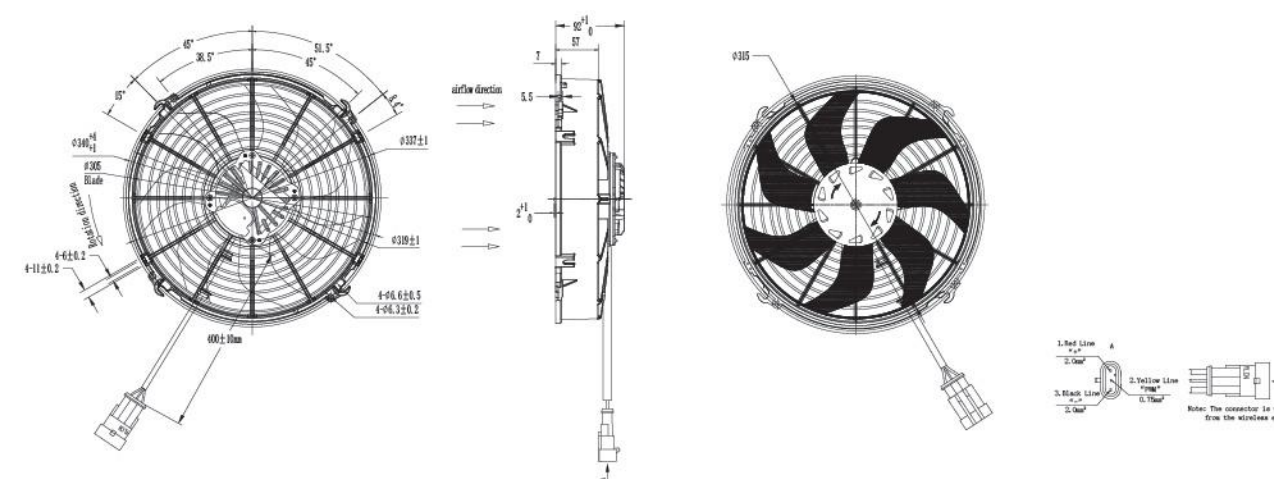

风量曲线图 Performance Curve

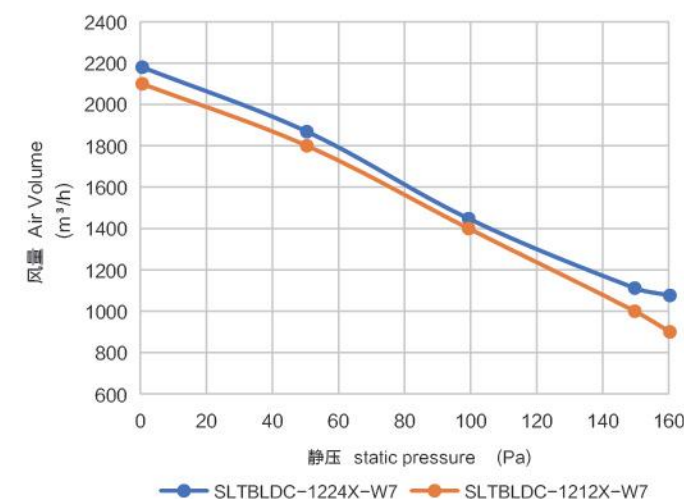




Brushless Fan  $\Phi$  305mm 12IN SLTBLDC-1212X/C-W10  
SLTBLDC-1224X/C-W10




| Specification: |                               |
|----------------|-------------------------------|
| 测试电压           | Test Voltage:12V              |
| 负载电流           | Load Current: $\leq 14.0A$    |
| 负载转速           | Load Speed: $3000 \pm 100rpm$ |
| 静 压            | Static Pressure:0Pa           |
| 风 量            | Air Volume: $\geq 1900m^3/h$  |
| 噪 音            | Noise: $\leq 73dB (A)$        |
| 振 动            | Vibration: $\leq 3.5m/S^2$    |
| 直 径            | Diameter:12inch               |

电机外型图 Dimensions:

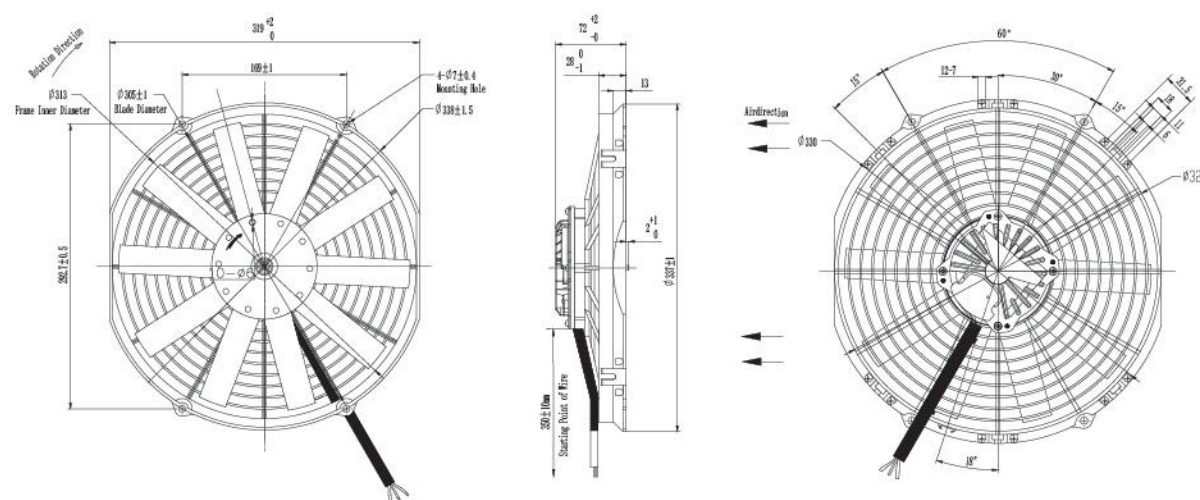

风量曲线图 Performance Curve

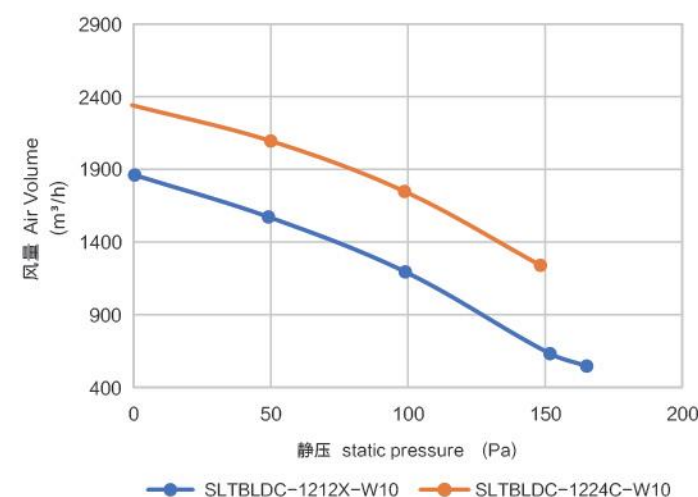


Brushless Fan  $\Phi$  355mm 14IN SLTBLDC-1412X/C-W10  
SLTBLDC-1424X/C-W10




| Specification: |                              |
|----------------|------------------------------|
| 测试电压           | Test Voltage:12V             |
| 负载电流           | Load Current: $\leq 16.0A$   |
| 负载转速           | Load Speed: $3800 \pm 50rpm$ |
| 静 压            | Static Pressure:0Pa          |
| 风 量            | Air Volume: $\geq 2000m^3/h$ |
| 噪 音            | Noise: $\leq 78dB (A)$       |
| 振 动            | Vibration: $\leq 3.5m/S^2$   |
| 直 径            | Diameter:14inch              |

电机外型图 Dimensions:

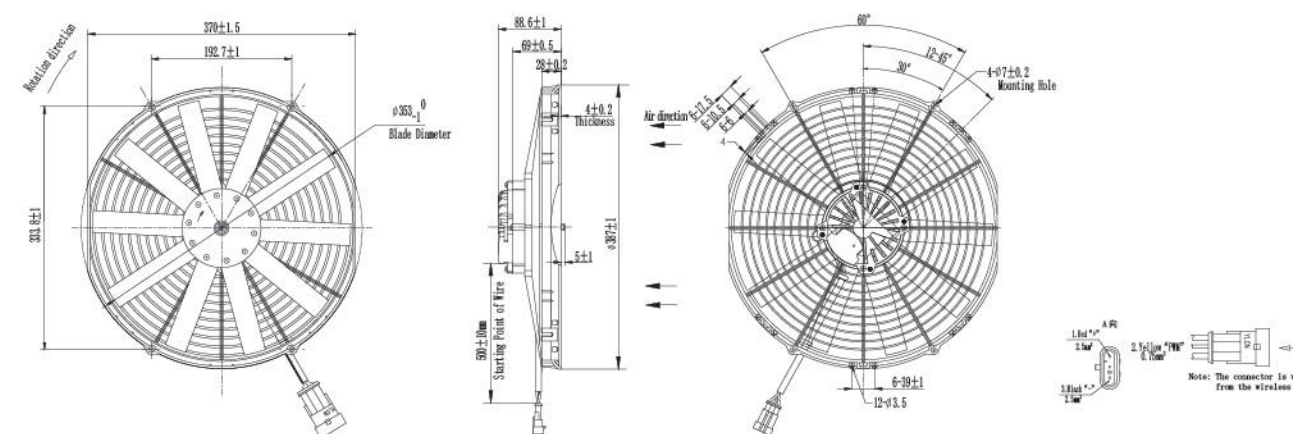

风量曲线图 Performance Curve

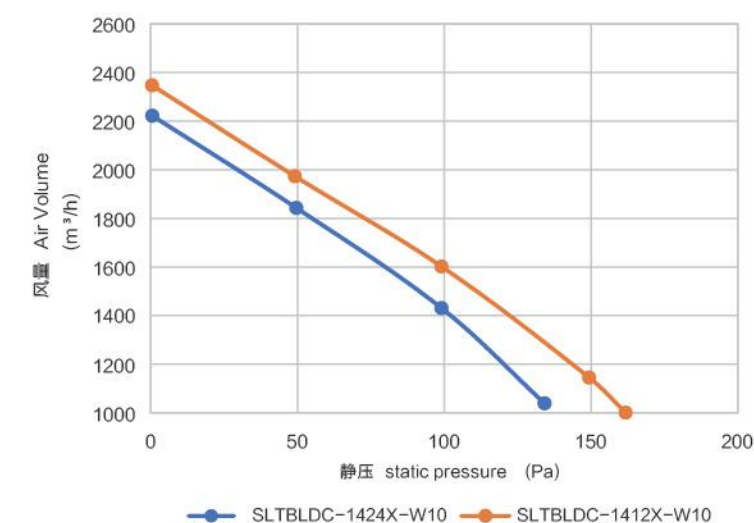




## Brushless Fan $\Phi$ 385mm 16IN SLTBLDC-1612X/C-W7 SLTBLDC-1624X/C-W7




### Specification:

|      |                                           |
|------|-------------------------------------------|
| 测试电压 | Test Voltage:12V                          |
| 负载电流 | Load Current: < 22.0A                     |
| 负载转速 | Load Speed:3000 $\pm$ 50rpm               |
| 静压   | Static Pressure:0Pa                       |
| 风量   | Air Volume:3000 $\pm$ 50m <sup>3</sup> /h |
| 噪音   | Noise: $\leq$ 78dB (A)                    |
| 振动   | Vibration: $\leq$ 3.5m/S <sup>3</sup>     |
| 直径   | Diameter: 16inch                          |

### 电机外型图 Dimensions:

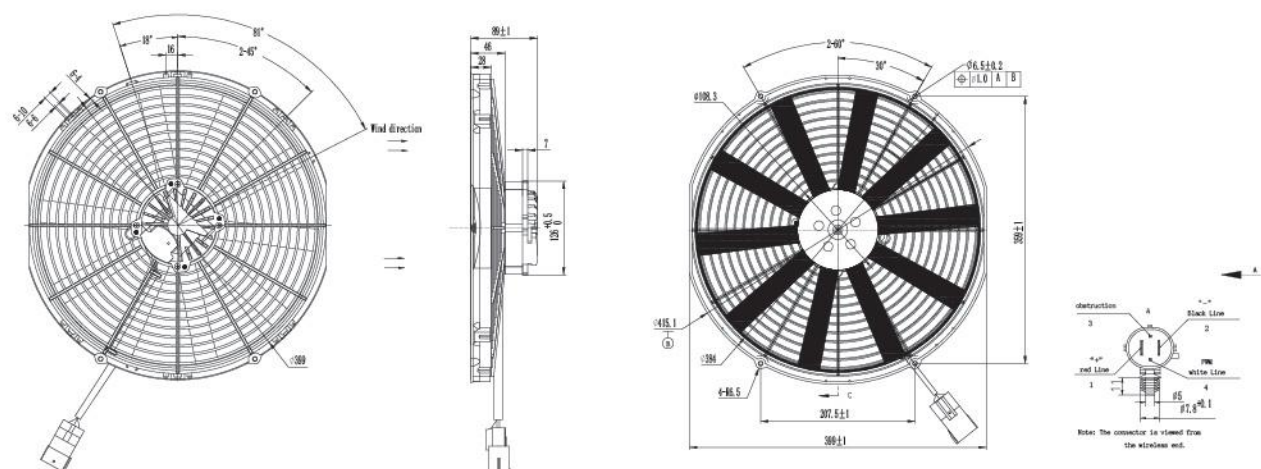

### 风量曲线图 Performance Curve

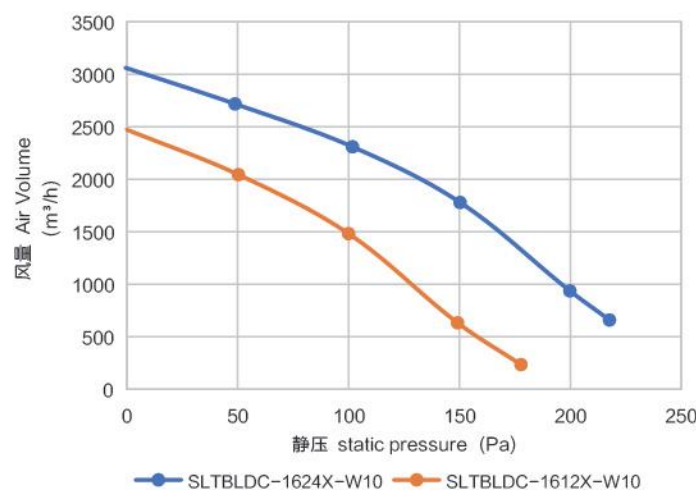

## Evaporating Fan SLT35024 SLT35012


### Reference Picture:



### Specification:

|      |                                          |
|------|------------------------------------------|
| 测试电压 | Test Voltage:27V                         |
| 1档电流 | Load Current: $\leq$ 5A                  |
| 转速   | Load Speed: $\geq$ 2400rpm               |
| 2档电流 | Load Current: $\leq$ 6A                  |
| 转速   | Load Speed: $\geq$ 2700rpm               |
| 3档电流 | Load Current: $\leq$ 8A                  |
| 转速   | Load Speed: $\leq$ 3200rpm               |
| 静压   | Static Pressure:0Pa                      |
| 风量   | Air Volume: $\leq$ 1100m <sup>3</sup> /h |
| 噪音   | Noise: $\leq$ 70db(A)                    |
| 振动   | Vibration: $\leq$ 3.5m/S <sup>2</sup>    |
| 尺寸   | Size:350x136x140                         |

### 电机外型图 Dimensions:

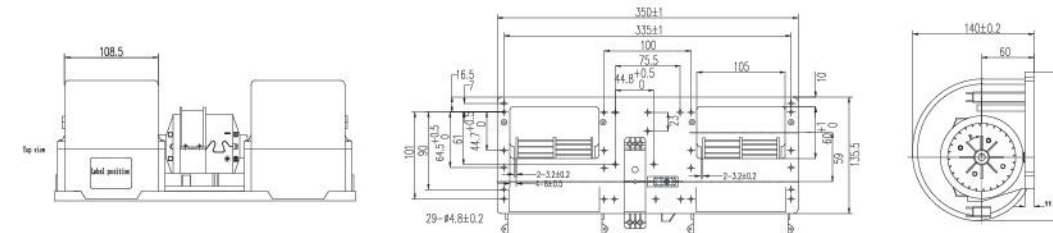

## Evaporating Fan SLT31024 SLT31012


### Reference Picture:



### Specification:

|      |                                         |
|------|-----------------------------------------|
| 测试电压 | Test Voltage:27V                        |
| 1档电流 | Load Current: $\leq$ 3.5A               |
| 转速   | Load Speed: $\leq$ 2900rpm              |
| 2档电流 | Load Current: $\leq$ 4.5A               |
| 转速   | Load Speed: $\leq$ 3200rpm              |
| 3档电流 | Load Current: $\leq$ 5A                 |
| 转速   | Load Speed: $\leq$ 3600rpm              |
| 4档电流 | Load Current: $\leq$ 6A                 |
| 转速   | Load Speed: $\leq$ 4000rpm              |
| 静压   | Static Pressure:0Pa                     |
| 风量   | Air Volume: $\leq$ 670m <sup>3</sup> /h |
| 噪音   | Noise: $\leq$ 70db(A)                   |
| 振动   | Vibration: $\leq$ 60mg                  |
| 尺寸   | Size:310x128x112                        |


### 电机外型图 Dimensions:

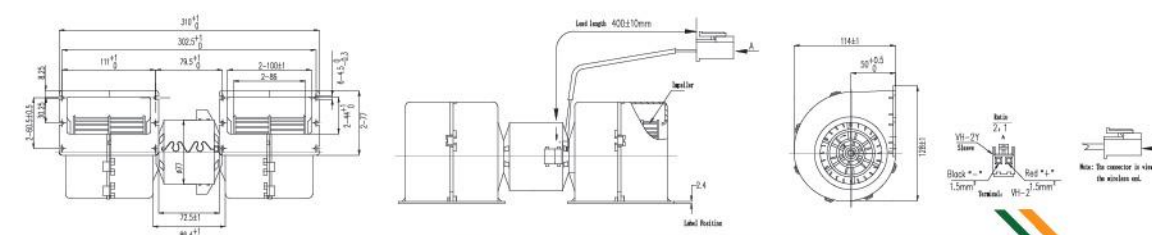




## Evaporating Fan SLTBLDC-31024 SLTBLDC-31012

Reference Picture:

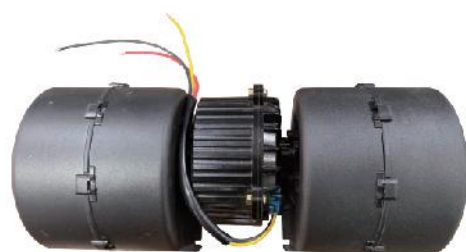

电机外型图 Dimensions:

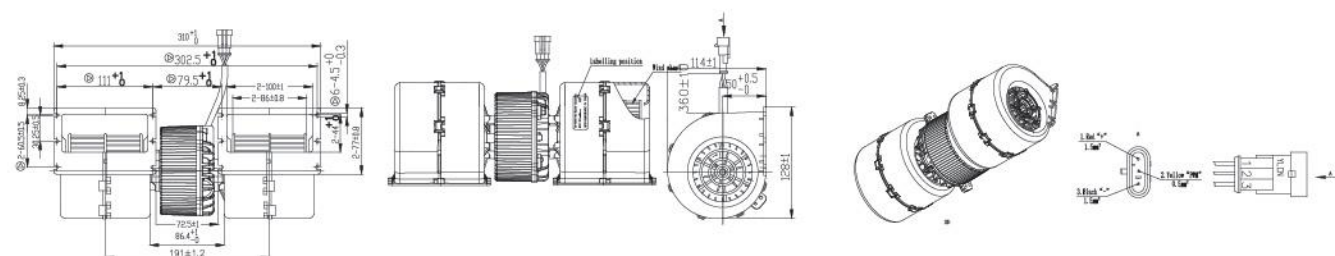


## Evaporating Fan SLTBLDC-35024 SLTBLDC-35012

Reference Picture:



电机外型图 Dimensions:

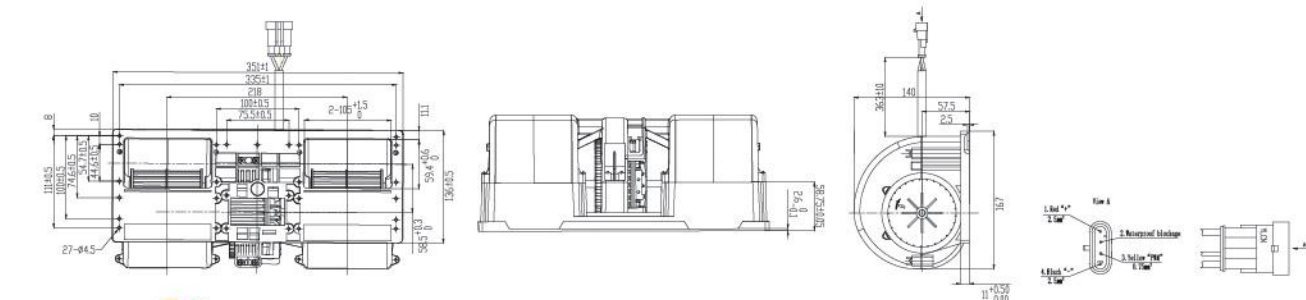


## Water Pump SLTDC-WP2790-25

Reference Picture:



电机外型图 Dimensions:

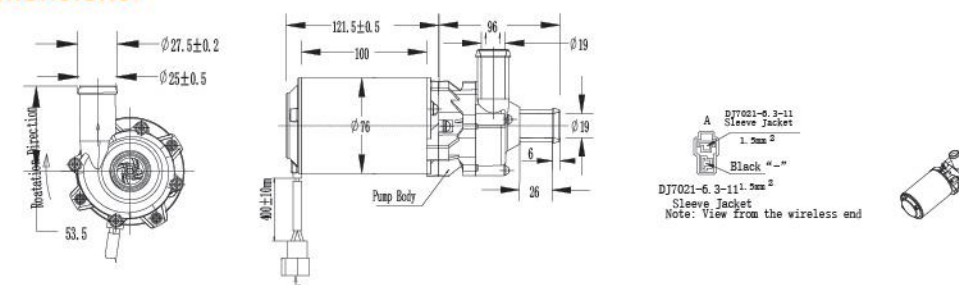


## Water Pump SLTDC-WP2790-38

Reference Picture:



电机外型图 Dimensions:

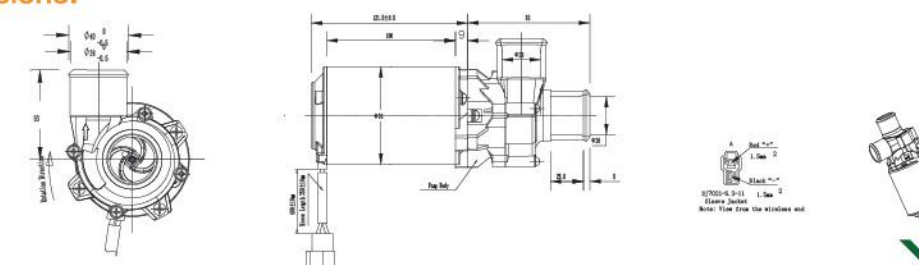



Other Products



型号 Model: 602890A-N01



型号 Model: 81000-E96A-096



型号 Model: 603605A



型号 Model: 603591A



型号 Model: YP12C300420



型号 Model: 603780A



型号 Model: 603628A



型号 Model: TD81145030A03666



型号 Model: YP12D100420



型号 Model: 602524A-3



型号 Model: 601585A1



型号 Model: TD8114503-0A03536




## Qualifications



型号 Model: TD8114503-0A03402



型号 Model: 8112DY-010-20

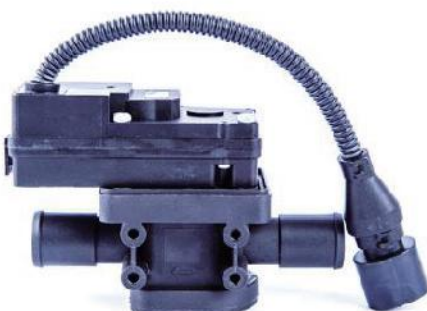


型号 Model: 602352A



型号 Model: 603697A



型号 Model: 603734A

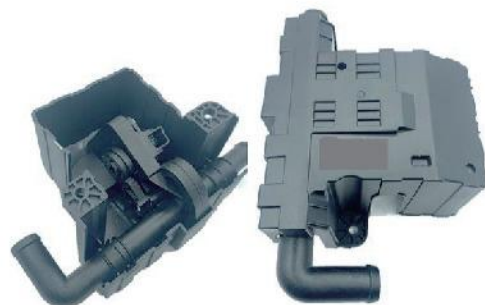

型号 Model: 603676A



省级高新技术企业



常州市半导体协会理事单位

